




APPLICATION NOTE

Catecholamine Analysis In Plasma

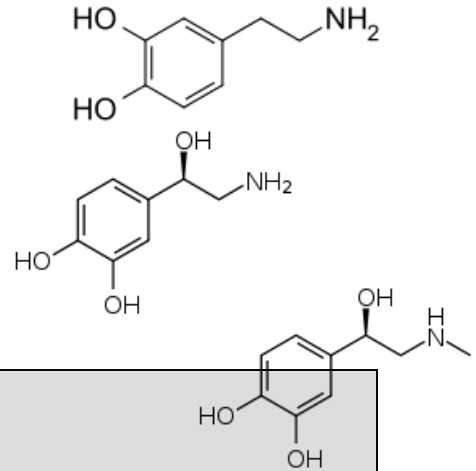

1. Analytical Condition

YL 9100 Series HPLC

Mobile Phase & Column : Use the column and Mobile phase of Chromsystem kit

Flow Rate : 1.3ml/min

Column Oven : 35°C

Detector : ECD (+500mV, 2nA, WE: Glassy Carbon)

Injection Volume : 20ul sample loop

2. Chromatogram

